



CHINMORE INDUSTRY CO.,LTD

Specification

1. Micro RF Coaxial Cable Assembly with RF Connector
2. *Chinmore's* No: CX-IPX113SMA-401
3. Frequency: 0.1 GHz ~3 GHz
4. VSWR: 2.0:1
5. Cable: 1.13
6. Color: Gray
7. Connector: SMA F(BH)
8. Working Temperature: -20°C~+85°C
9. 40u" of low stress nickel, 3 u" of gold
10. Transmission loss: 0.39dBi


✘RoHS Compliant

✘ISO 9001 & ISO 14001

Cable	∅1.13±0.1mm
Cover	Grey (灰)
I.PX	Gold (鍍金)
SMA F(BH)	Gold (鍍金)

- 1.Working temperature -40~+85°C
- 2.40u" of low stress nickel,3u" of gold.
- 3.Transmission loss : 0.39 dB
- 4.Frequency Range : 0.1GHz~3GHz

ROHS
 ISO 9001
 ISO 14001

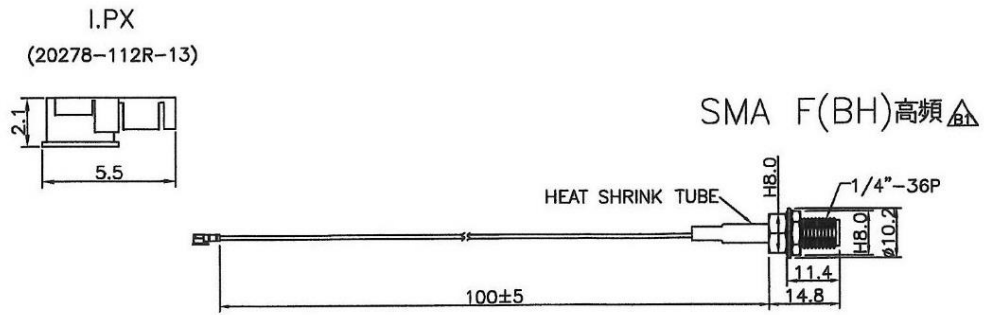

Material:		Treatment:		竣茂工業有限公司 Chinmore Industry CO .LTD			
Drawer	Design	Aprov	Tolerance	Unit: mm		TITLE	I.PX+1.13鍍材+SMA F(BH)
機構 日期 4.25 倉曉淵				X=±0.5	Ver: B	Scale 1:1	Model NO WIREAC1037
日期 4.25 倉曉淵				X=±0.2	File NO: QR0402	Drawing NO	100-23005-008
日期 4.25 倉曉淵				XX=±0.1			
日期 4.25 倉曉淵				.XXX=±0.05			
NO	DESCRIPTION	MATERIAL / FINISH	QTY				
Part NO	CX-IPX113SMA-401						

Frequency (MHz)	VSWR	Insertion Loss (dB)
1000	1.04	-0.27
2000	1.06	-0.40
3000	1.06	-0.48

TEST Report

