



CHINMORE INDUSTRY CO.,LTD

Specification

1. Cable Assembly with RF Cable
2. *Chinmore's* No: CX-SMA174SMA-1900
3. Frequency: 1~3 GHz
4. VSWR: 2.0:1
5. Cable: RG-174
6. Connector: SMA (M) ST & SMA F(BH)

✧RoHS Compliant

✧ISO 9001 & ISO 14001

Cable	RG174/U	<div style="border: 1px solid black; padding: 5px; display: inline-block;"> ROHS ISO 9001 ISO 14001 </div>
OD	ø2.7±0.15mm	
Cover	Black (黒)	
SMA M	Gold (鍍金)	
SMA F(BH)	Gold (鍍金)	

SR : A-4002
MATERIAL : 40P

HEAT SHRINK TUBE


1/4"-36P

1500±25

Material:	Treatment:	竣茂工業有限公司 Chinmore Industry CO.,LTD					
Drawer	Design	Aprav	Tolerance	Unit: mm		TITLE	SMA M+174U+SMA F(BH)
				X=±0.5	Ver: A	Scale 1:1	Model NO
				X=±0.2	File NO: QR0402	Drawing NO	100-23005-0316
				X=±0.1			
				XXX=±0.05			

Frequency (MHz)	VSWR	Insertion Loss (dB)
1000 MHz	1.07	-1.58
2000 MHz	1.12	-2.40
3000 MHz	1.49	-3.44

Test Report

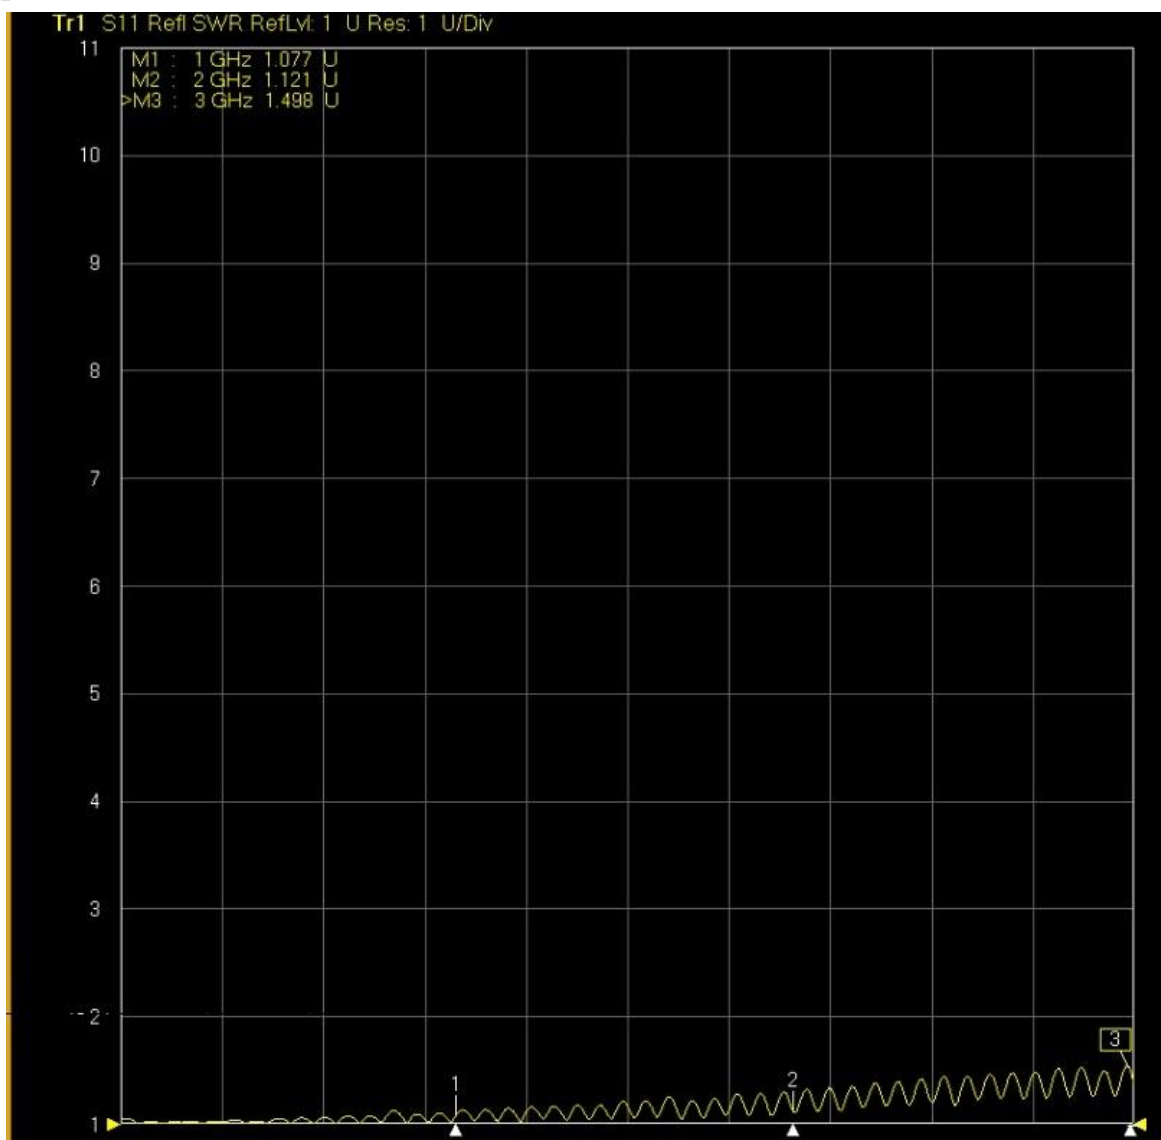

▶ **Tr2** S21 Trans LogM RefLvl: 0 dB Res: 10 dB/Div

