



CHINMORE INDUSTRY CO.,LTD


Specification

1. Product Type: 4G/LTE Adhesive Mount Antenna
2. Chinmore No: C09-5 series
3. Frequency: 690/960/1710/2170/2700 MHz
4. VSWR: 2.5:1
5. Cable RG-174 0.5m with SMA (M) ST connector
6. 3M sticker & Alcohol Pad

✧RoHS Compliant

✧Waterproof IP67 Rated

✧ISO 9001 & ISO 14001

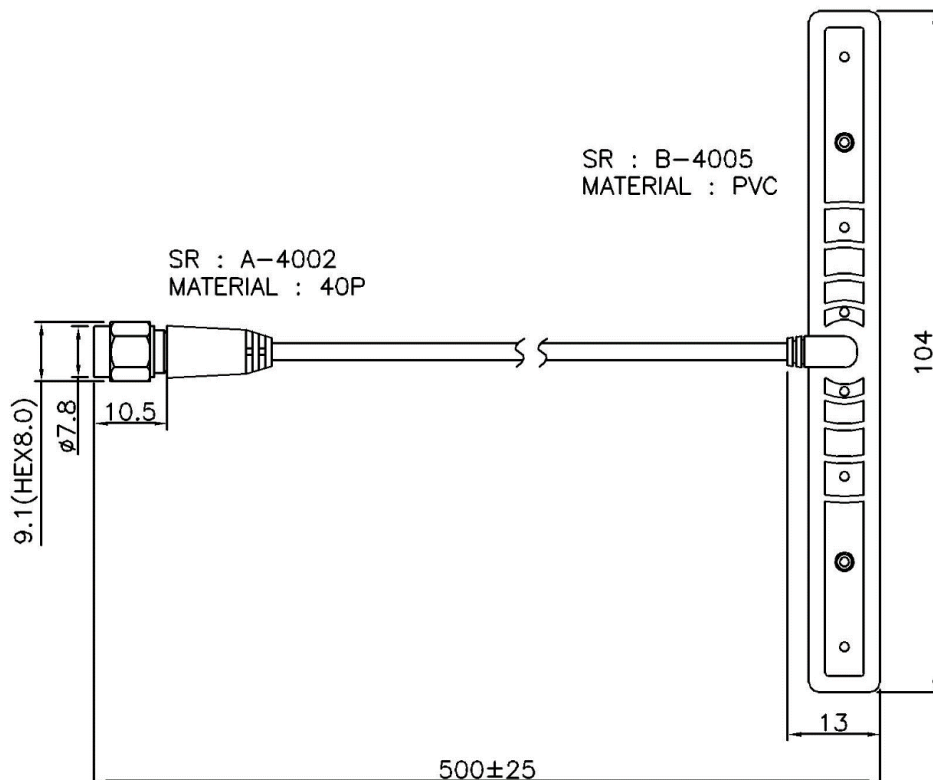


ELECTRICAL


Frequency (MHz)	Gain (dB)	Efficiency (%)
690	1.57	49.43
750	2.56	81.47
830	2.26	70.79
960	0.48	44.87
1710	7.25	68.55
1880	4.53	57.54
2170	4.39	62.37
2600	7.31	89.95

Measurement Method


1. TEST Report

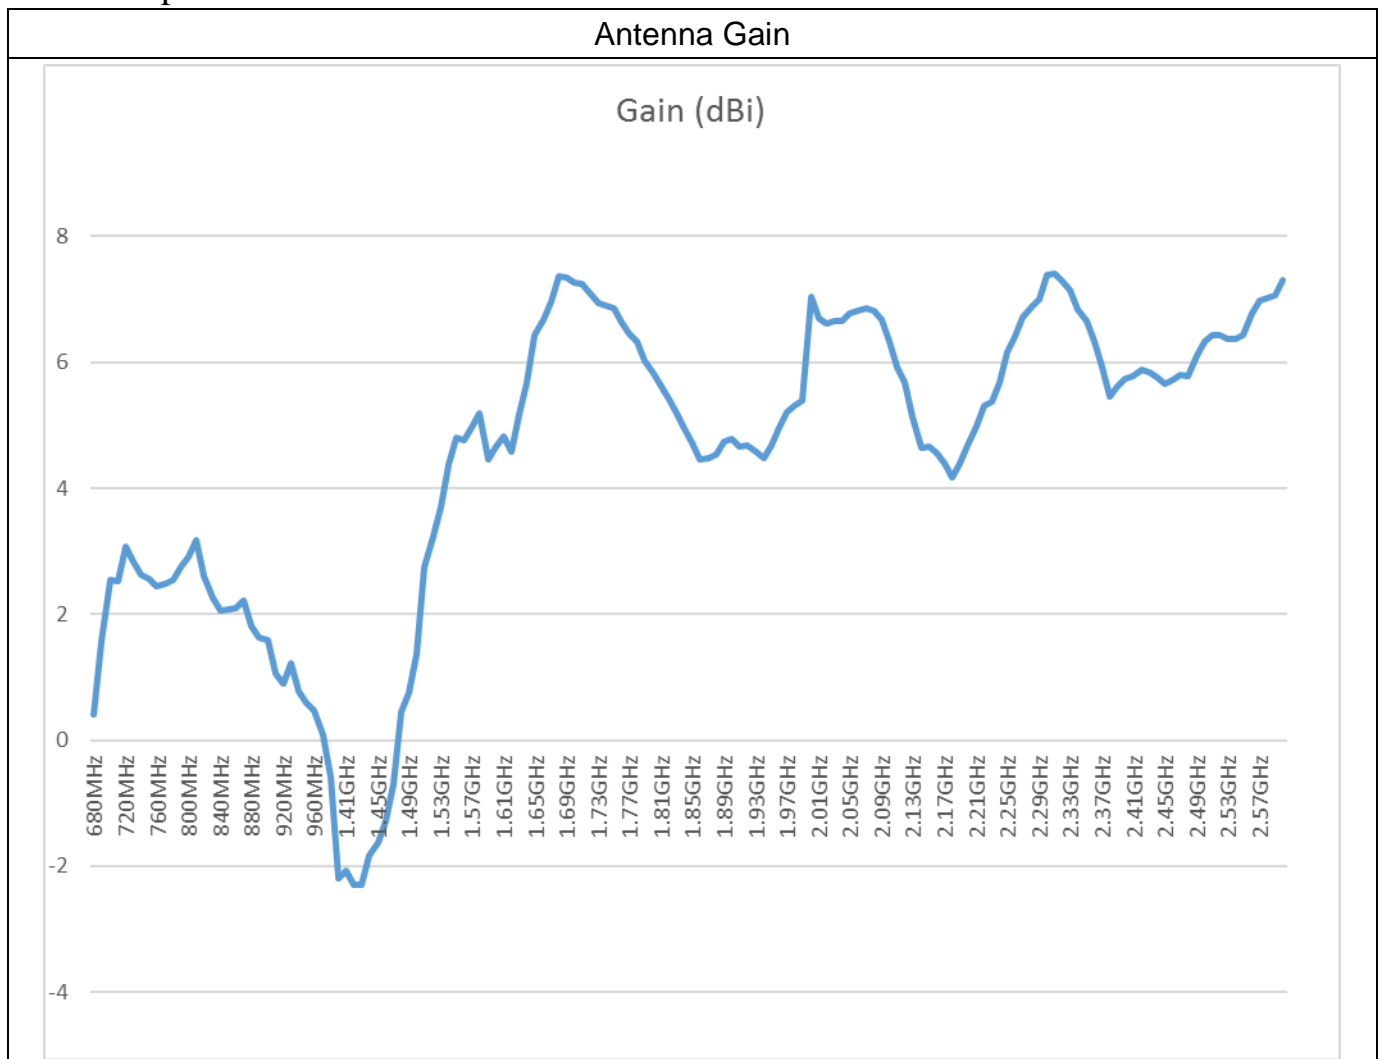

VSWR

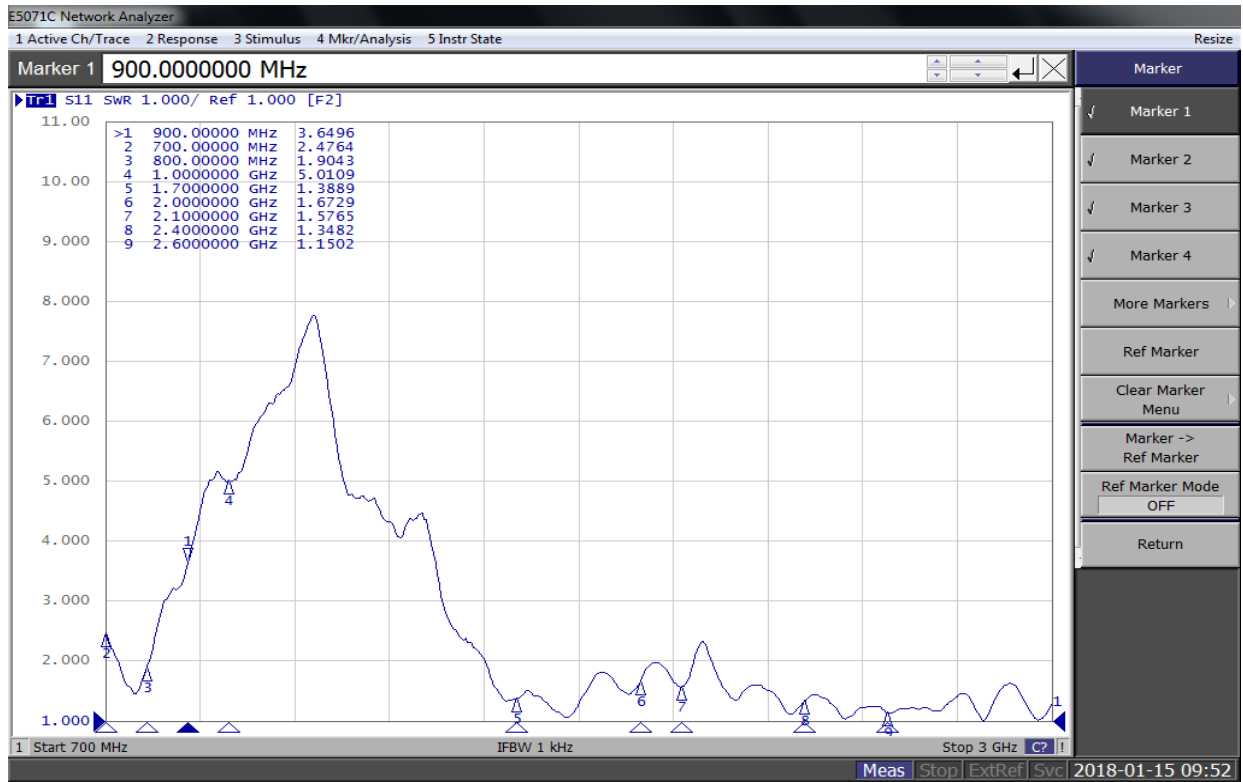


Return Loss

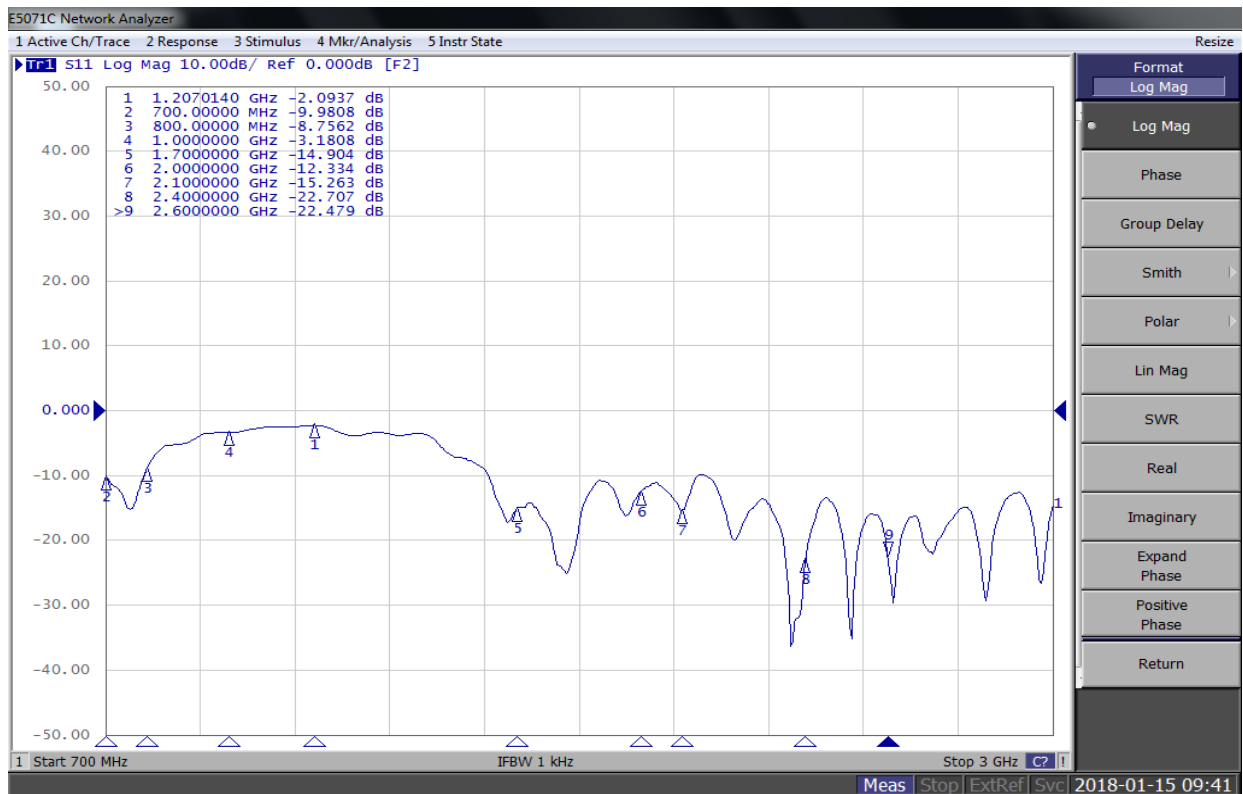

Test Report(3D)



700MHz

Total_3D_Side View 1_700MHz





780MHz

Total_3D_Side View 1_780MHz





880MHz

Total_3D_Side View 1_880MHz





980MHz

Total_3D_Side View 1_980MHz





2.1GHz

Total_3D_Side View 1_2.1GHz



2.6GHz

Total_3D_Side View 1_2.6GHz



Test Photo

