



# CHINMORE INDUSTRY CO.,LTD

## Specification

1. Cable Assembly with RF Connector
2. *Chinmore's* No: CX-SMA58USMA-1733
3. Frequency: 1~3 GHz
4. VSWR: 2.0:1
5. Cable: RG-58 10M
6. Connector: SMA (M) ST & SMA F Bulkhead

✧RoHS Compliant

✧ISO 9001 & ISO 14001


Cable	RG58/U	綁線方式：8字型	<b>ROHS</b>			
OD	ø5.0±0.15mm		ISO 9001			
Cover	Black (黑)		ISO 14001			
SMA M	Gold (鍍金)					
SMA F(BH)	Gold (鍍金)					

Material:		Treatment:		竣茂工業有限公司 Chinmore Industry CO.,LTD			
Drawer	Design	Appov	Tolerance	Unit:	mm	TITLE	SMA M+58U+SMA F(BH)
			X=±0.5	Ver:	A	Scale 1:1	Model NO
			X=±0.2			Model NO	WIREAC1661
			XX=±0.1	File NO:	QR0402	Drawing NO	100-23005-0238
			XXX=±0.05				

Frequency (MHz)	VSWR	Insertion Loss (dB)
1000 MHz	1.10	-3.41
2000 MHz	1.20	-5.32
3000 MHz	1.40	-7.26

## Test Report

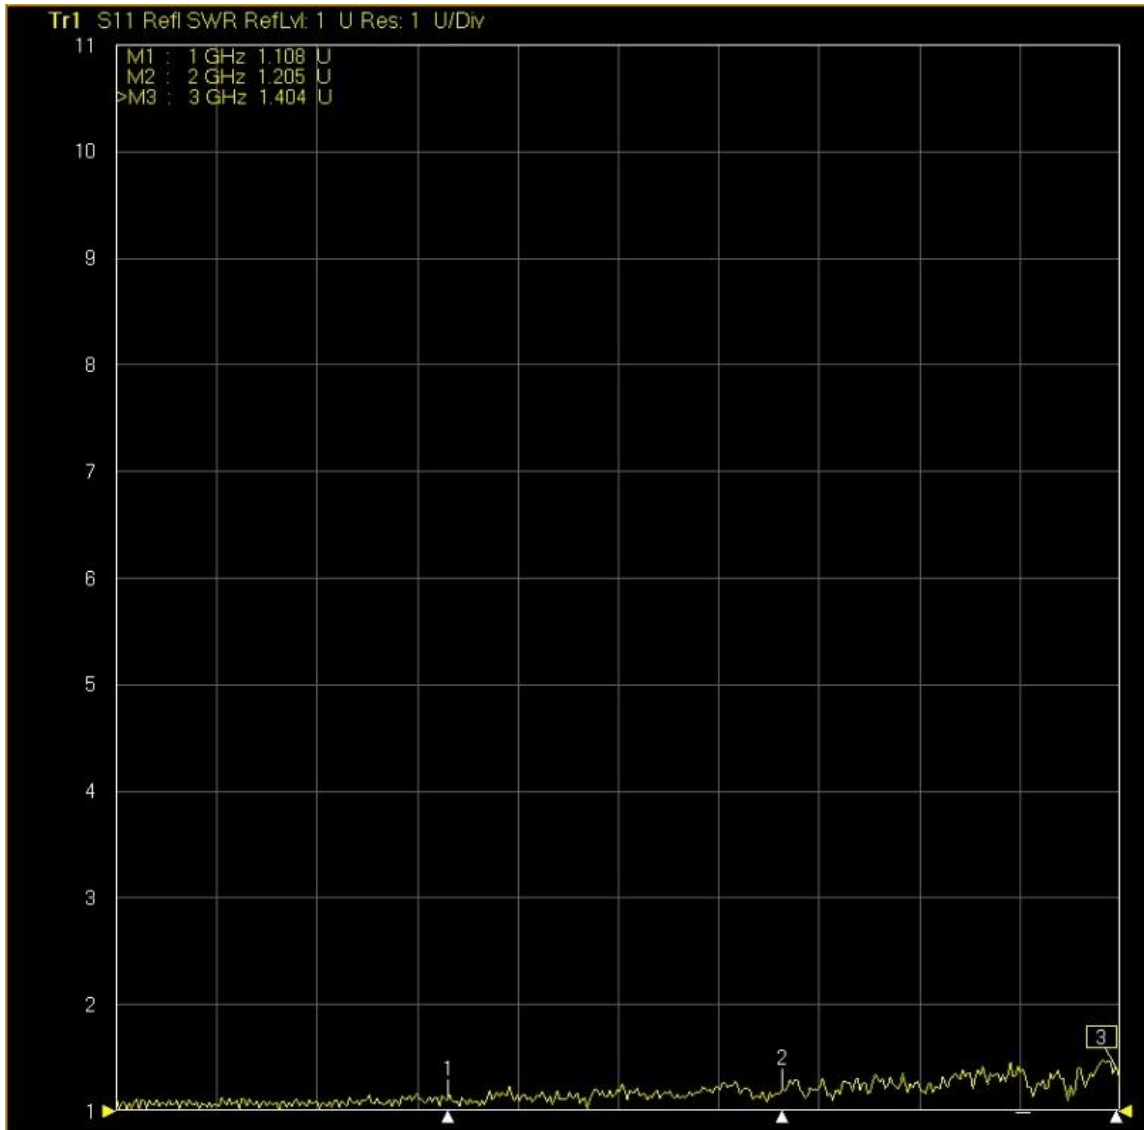

▶ **IT2** S21 Trans LogM RefLvl: 0 dB Res: 10 dB/Div

