



# CHINMORE INDUSTRY CO.,LTD

## Specification

1. Cable Assembly with RF Connector
2. *Chinmore's* No: CX-MCX174SMA-723
3. Frequency: 600MHZ~3GHz
4. VSWR: 2.0:1
5. Cable: RG-174 100mm
6. Connector: SMA F Bulkhead & MCX M

✧RoHS Compliant

✧ISO 9001 & ISO 14001

Cable	RG174/U	<div style="border: 1px solid black; padding: 5px; display: inline-block;"> <b>ROHS</b>            ISO 9001            ISO 14001         </div>
OD	∅2.7±0.15mm	
Cover	Black	
MCX M	Gold(鍍金)	
SMA(BH)F	Gold(鍍金)	

SR : A-4008  
MATERIAL : 40P

HEAT SHRINK TUBE


100±5

Material:		Treatment:		竣茂工業有限公司 Chinnore Industry CO.LTD			
Drawer	Design	Approv	Tolerance	Unit: mm		TITLE	MCX M+174U+SMA(BH)F
			X=±0.5	Ver: A	Scale 1:1	Model NO	WIREAC1137
			X=±0.2	File NO: QR0402		Drawing NO	100-23005-062-1
			XX=±0.1				
			XXX=±0.05				

NO	DESCRIPTION	MATERIAL	Q'TY
Part NO	CX-MCX174SMA-723		

Frequency (MHz)	VSWR	Insertion Loss (dB)
600 MHz	1.10	-0.49
1000 MHz	1.02	-0.63
1500 MHz	1.18	-0.81
1800 MHz	1.16	-0.89
2000 MHz	1.14	-0.90
2100 MHz	1.11	-0.92
2400 MHz	1.26	-1.02
2700 MHz	1.50	-1.24
3000 MHz	1.26	-1.15

### TEST Report

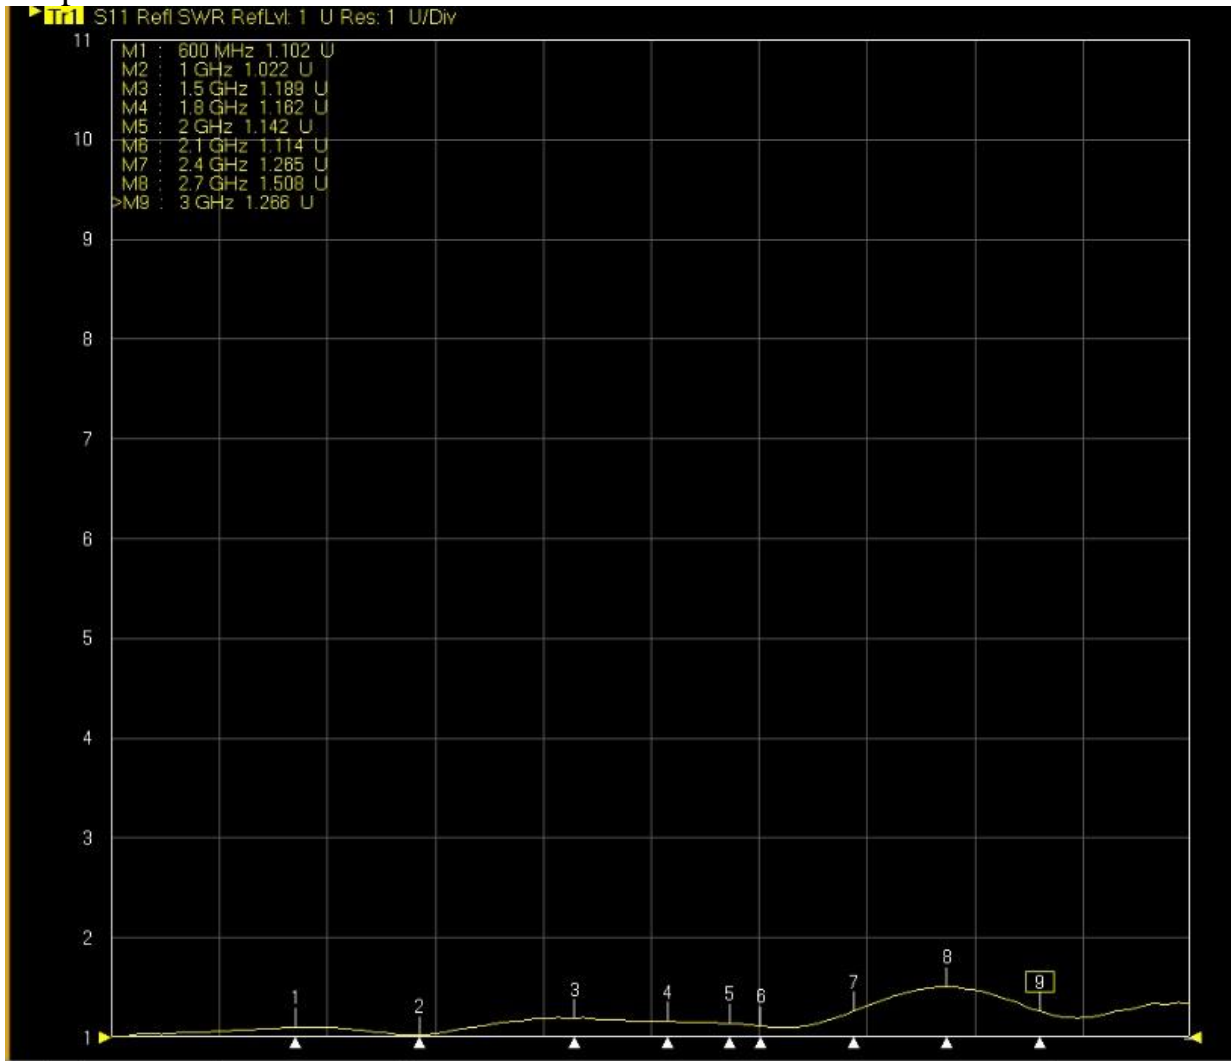

Tr2 S12 Trans LogM RefLvl: 0 dB Res: 10 dB/Div

