



CHINMORE INDUSTRY CO.,LTD

Specification

1. Mini Coaxial Cable Assembly with RF Connector
2. *Chinmore's* No: CX-MHF113SMA-948
3. Frequency:600MHz~3GHz
4. VSWR:2.0:1
5. Cable: $\varnothing 1.13 \pm 0.02\text{mm}$
6. Connector: RP SMA F Bulkhead & MHF(IPX)

✧RoHS Compliant

✧ISO 9001 & ISO 14001


OD	$\varnothing 1.13 \pm 0.02\text{mm}$	※華司/螺姆/防水圈另附 轉接線需單包	<div style="border: 1px solid black; padding: 5px; display: inline-block;"> ROHS ISO 9001 ISO 14001 </div>		
Cover	Gaey (※)				
SMA F(BH)RP(A型)	Gold(鍍金)				
MHF(IPX)	Gold(鍍金)				

SMA F(BH)RP(A型)

Material:		Treatment:		竣茂工業有限公司 Chinmore Industry CO .LTD			
Drawer	Design	Aprov	Tolerance	Unit:	\varnothing	TITLE	IPX+1.13mm+SMAF(BH) RP(A型)
			Y=±0.5	mm			
			X=±0.2	Ver: A	Scale 1:1	Model NO	WIREAC1233
			XX=±0.1	File NO: QR0402	Drawing NO	100-23005-126	
			XXX=±0.05				

Frequency (MHz)	VSWR	Insertion Loss (dB)
600	1.04	-0.26
1000	1.06	-0.37
1500	1.23	-0.51
1800	1.39	-0.62
2000	1.40	-0.71
2100	1.44	-0.60
2400	1.47	-0.77
2700	1.57	-0.81
3000	1.79	-0.49

Test Report

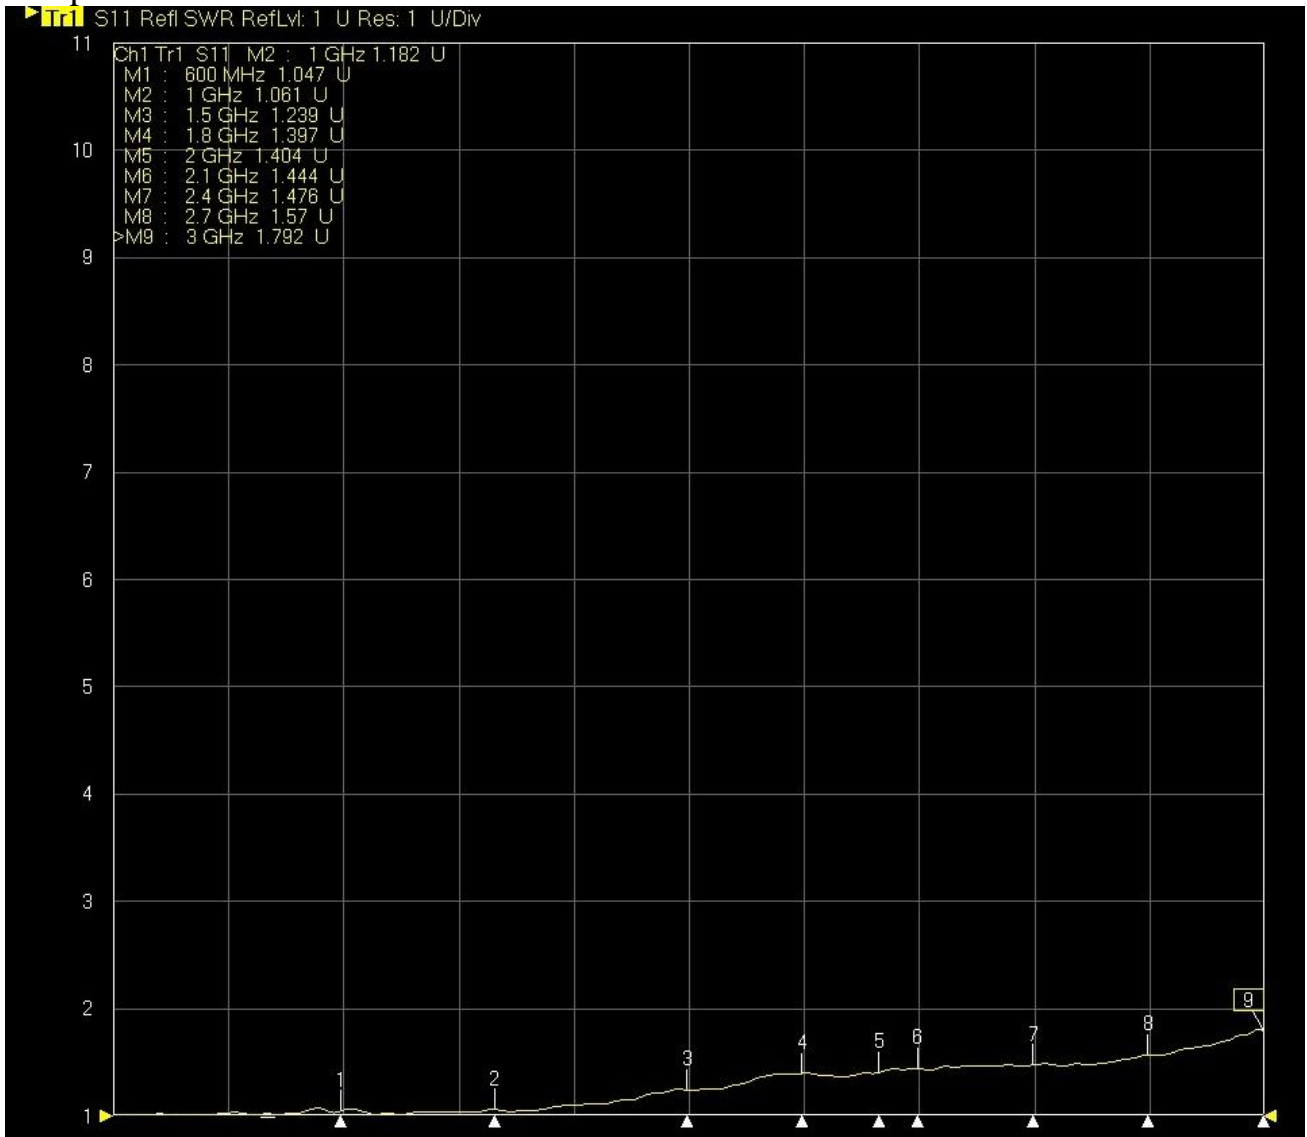

Tr2 S21 Trans LodM RefLvl: 0 dB Res: 10 dB/Div

