



CHINMORE INDUSTRY CO.,LTD

Specification

1. Cable Assembly with RF Connector
2. *Chinmore's* No: CX-SMA174MMCX-832
3. Frequency: 1~3GHz
4. VSWR: 2.0:1
5. Cable: RG-178 130mm
6. Connector: RA MMCX M & SMA F Bulkhead Straight


✧RoHS Compliant

✧ISO 9001 & ISO 14001

Cable	RG178/U
∅D	∅1.8±0.1mm
Cover	Brown
MMCX 90° M	Gold<鍍金>
SMA(BH)F A	Gold<鍍金>

ROHS

ISO 9001
ISO 14001

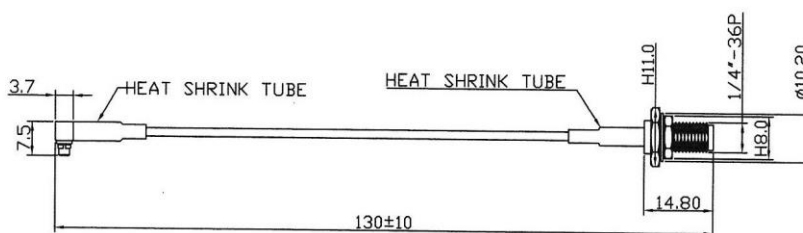


Material:		Treatment:		竣茂工業有限公司 Chinmore Industry CO.,LTD			
Drawer	Design	Approv	Tolerance	Unit:	mm	TITLE	MMCX 90° M+178U+ SMA(BH)F A
99.12.14		工程	X=±0.5	Ver:	B	Scale	1:1
		蔡文壽	X=±0.2	Model NO			
			X=±0.1	File NO:	QR0402	Drawing NO	100-23005-129
			XXX=±0.05				

NO	DESCRIPTION	MATERIAL	Q'TY
Part NO	CX-SMA178MMCX-832		

Frequency (MHz)	VSWR	Insertion Loss (dB)
1000 MHz	1.26	-0.39
2000 MHz	1.51	-0.63
3000 MHz	1.65	-0.98

TEST Report

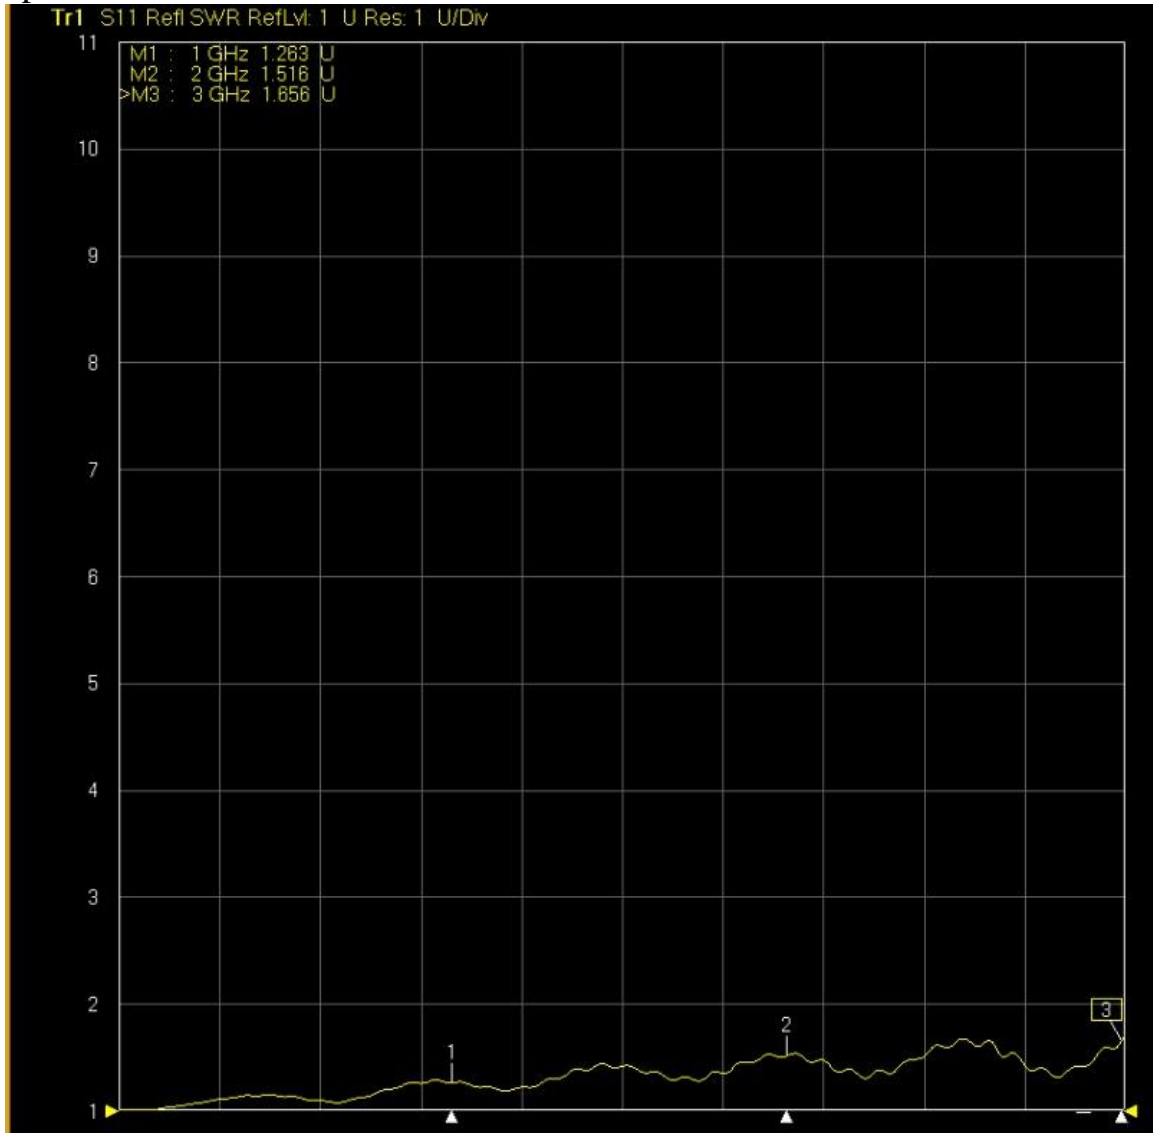

S21 Trans LogM RefLvl: 0 dB Res: 10 dB/Div

