



# CHINMORE INDUSTRY CO.,LTD

## Specification

1. Cable Assembly with RF Connector
2. *Chinmore's* No: CX-SMA1354SMA-1828
3. Frequency: 600MHz~3GHz
4. VSWR: 1.8:1
5. Cable: 1354(22#1C+AB) 2M
6. Connector: SMA (M) ST & SMA F Bulkhead

*※RoHS Compliant*

*※ISO 9001 & ISO 14001*


Cable	1354 (22#1C+AB)	注意線材規格 包裝方式：1Pcs1PE袋 (PK-118) $\triangle_{B1}$	 ISO 9001 ISO 14001
OD	$\phi 3.3 \pm 0.15\text{mm}$		
Cover	Black (黑)		
SMA M	Gold (鍍金)		
SMA F(BH)	Gold (鍍金)		

2017/12/18 $\triangle_{B1}$ 變更 PE袋	機檢 106.12.13 唐曉海	工業 106.12.13	Material:      Treatment:      竣茂工業有限公司 Chinmore Industry CO .LTD	Unit: mm      TITLE: SMA F(BH)+1354+SMA M Ver: B      Scale 1:1      Model NO: File NO: QR0402      Drawing NO: 100-23005-0305
NO      DESCRIPTION      MATERIAL / FINISH      QTY	Part NO      CX-SMA1354SMA-1828			

Frequency (MHz)	Return Loss (dB)	VSWR
600	-1.66	1.08
1000	-2.27	1.16
1500	-2.92	1.19
1800	-3.36	1.26
2000	-3.45	1.22
2100	-3.63	1.25
2400	-3.94	1.29
2700	-4.19	1.31
3000	-4.56	1.42

## Test Report

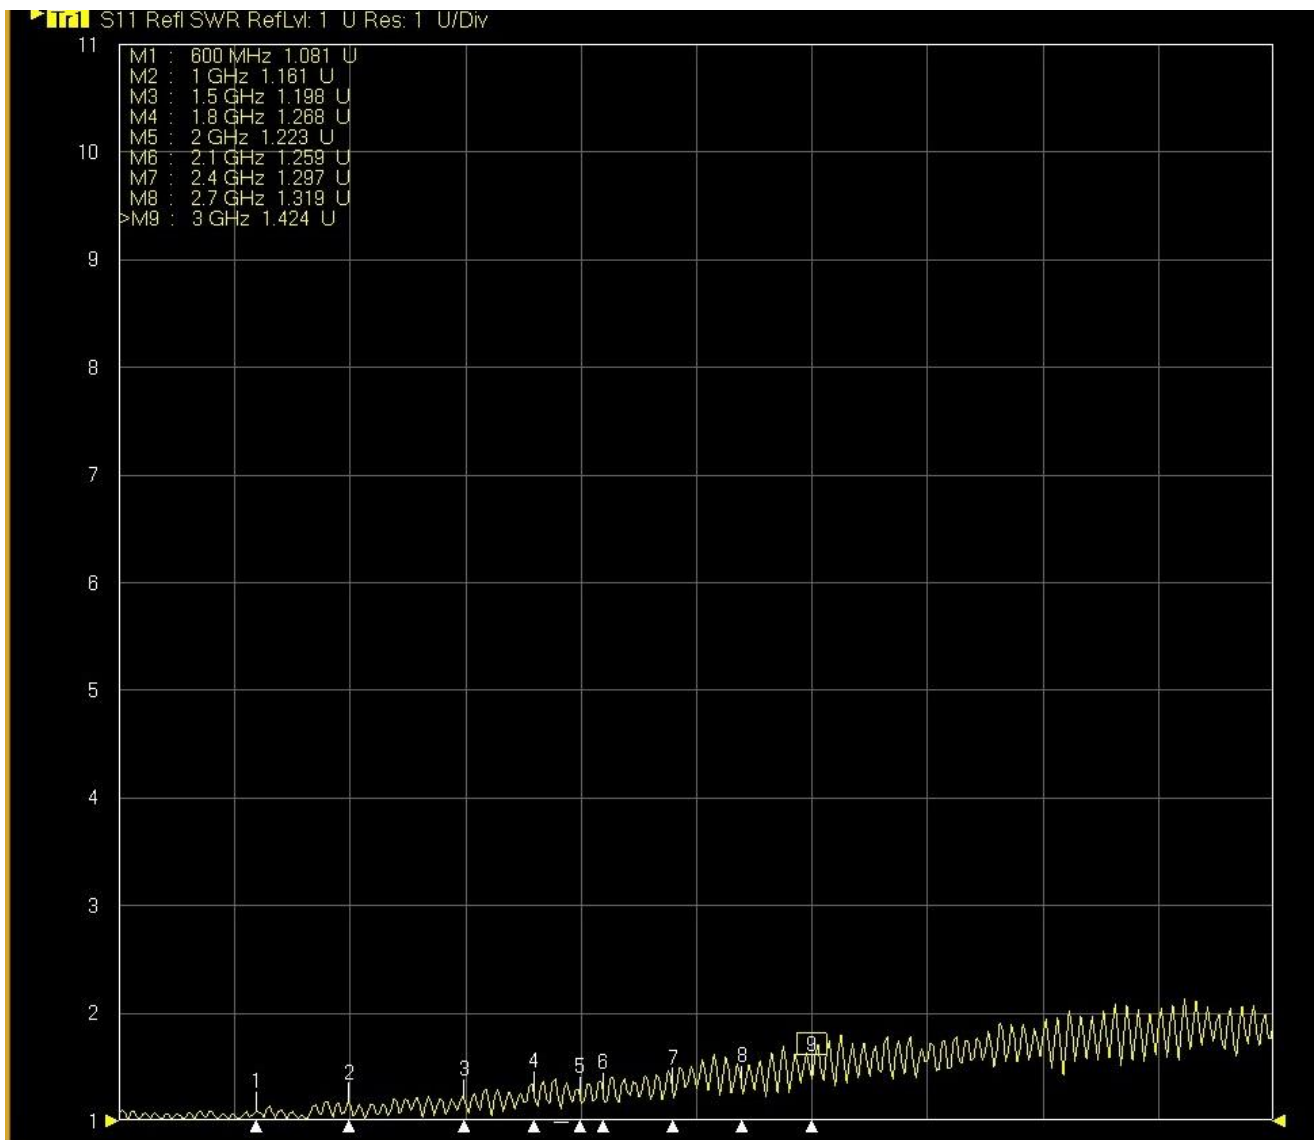

Tr2 S21 Trans Load RefLvl: 0 dB Res: 10 dB/Div

