



CHINMORE INDUSTRY CO.,LTD

Specification

1. Mini Coaxial Cable Assembly with RF Connector
2. *Chinmore's* No: CX-MHF113SMA-757
3. Frequency: 600MHz~3GHz
4. VSWR: 2.0:1
5. Cable: 1.13
6. Connector: SMA F Bulkhead A Type & MHF(IPX)


✧RoHS Compliant

✧ISO 9001 & ISO 14001

OD	φ1.13±0.05mm
Cover	Galv (鍍)
SMA(BH)F A	Gold(鍍金)
MHF(IPX)	Gold(鍍金)

ROHS


ISO 9001
ISO 14001

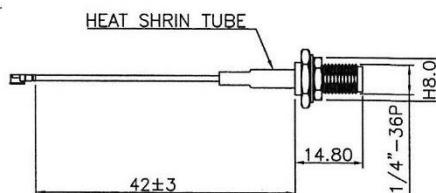

Material:		Treatment:		竣茂工業有限公司 Chinmore Industry CO .LTD			
NO	DESCRIPTION	MATERIAL	FINISH	QTY	Unit: mm	TITLE	IPX+1.13鍍材+SMA(BH)F A
Part NO	CX-MHF113SMA-757				Ver: A	Scale 1:1	Model NO WIREAC1165
					File NO: QR0402	Drawing NO	100-23005-051

Frequency (MHz)	VSWR	Insertion Loss (dB)
600	1.04	-0.28
1000	1.19	-0.46
1500	1.37	-0.73
1800	1.46	-0.97
2000	1.42	-0.99
2100	1.44	-0.99
2400	1.49	-1.14
2700	1.63	-1.49
3000	1.89	-1.11

TEST Report

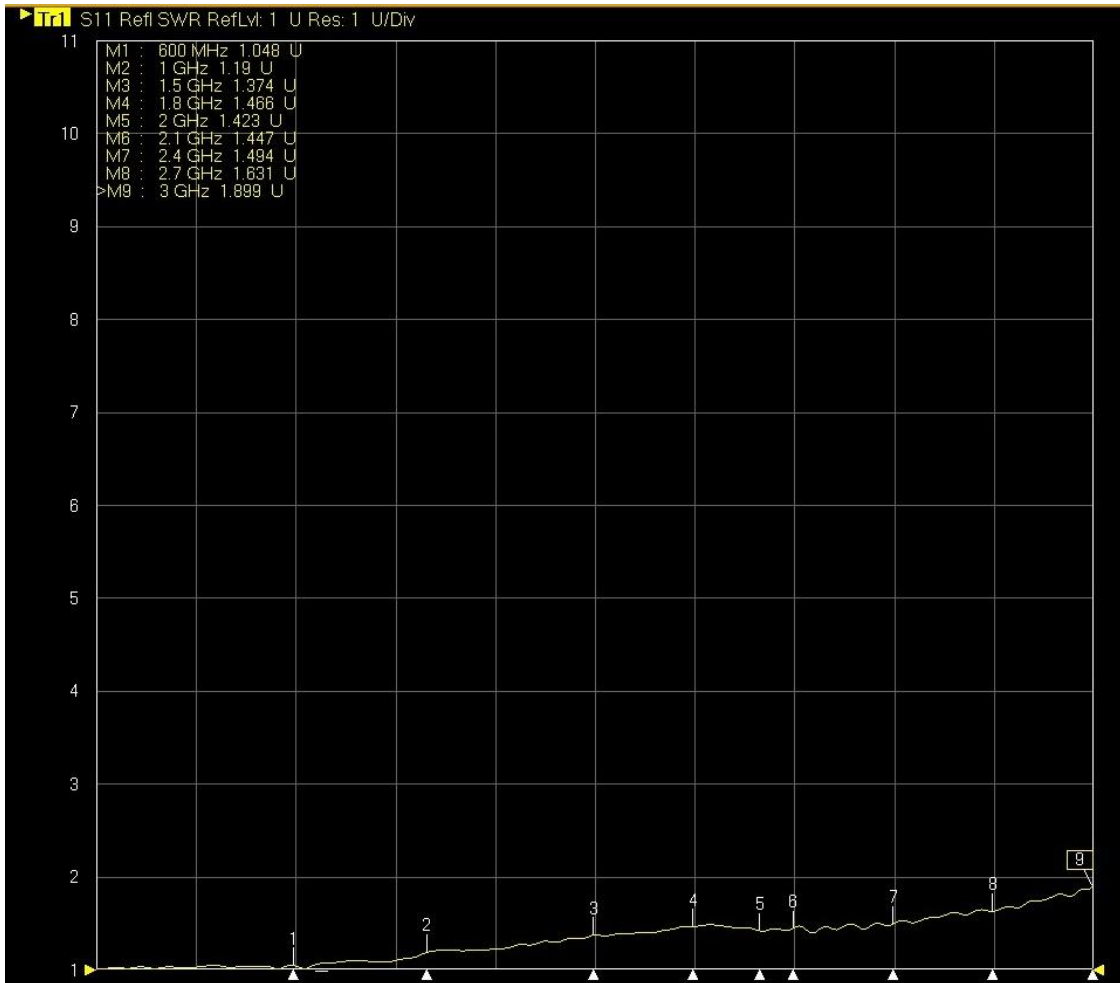

Tr2 S21 Trans LocM RefLvl: 0 dB Res: 10 dB/Div

