



CHINMORE INDUSTRY CO.,LTD

Specification


1. Cable Assembly with RF Connector
2. *Chinmore's* No: CX-MMCX174SMA-1257
3. Frequency: 1~3GHz
4. VSWR: 2.0:1
5. Cable: RG-174 300mm
6. Connector: SMA F Bulkhead & RA MMCX M

✧RoHS Compliant

✧ISO 9001 & ISO 14001

Cable	RG174/U
OD	ø2.7±0.15mm
Cover	Black
MMCX 90° M	Gold(鍍金)
SMA(BH)F	Gold(鍍金)

ROHS
ISO 9001
ISO 14001

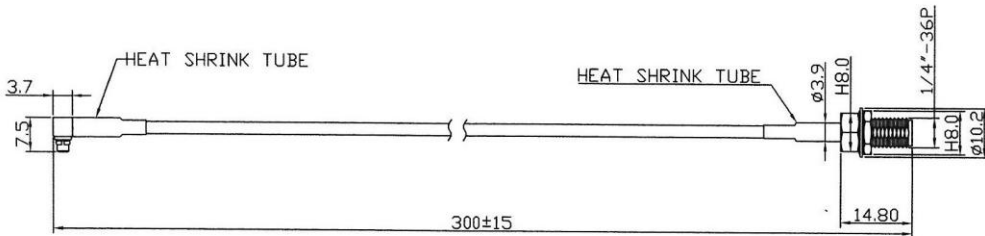

Material:		Treatment:		竣茂工業有限公司 Chinmore Industry CO .LTD			
Drawer	Design	Approv	Tolerance	Unit:	mm	TITLE	MMCX 90° M+174U+SMA(BH)F
			X=±0.5	Ver:	A	Scale	1:1
			X=±0.2	Model	NO		
			XX=±0.1	File	NO:	QR0402	Drawing
			XXX=±0.05	Drawing	NO	100-23005-0189	
Part NO	CX-MMCX174SMA-1257						

Frequency (MHz)	VSWR	Insertion Loss (dB)
1000	1.07	-0.37
2000	1.24	-0.65
3000	1.50	-0.97

TEST Report

